
ANRIN HYDROTEC≈

SCANDIC SN 600 / INLET GRATING

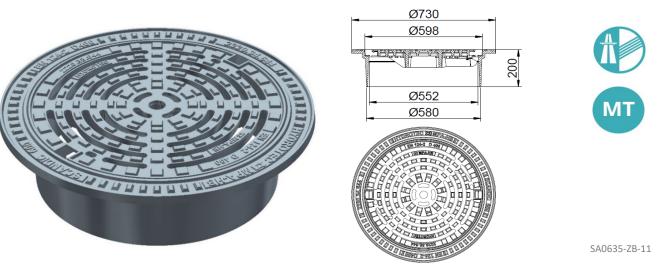

Reference	Class	Standard	Material	Weight	Sold by Pallet
89463500	D 400	DIN EN 124	EN-GJS	ca. 92 kg	5

SCANDIC SN 600

The intelligent solution of self-leveling/floating frame. Loading class D400 for use on carriageways of roads for areas with medium traffic (MT).

Frame

- self-levelling / roll-in frame
- · becomes an integrated part of the road surface
- relief on the shaft of up to 60%
- suitable for shafts of dia. 600mm!

Insert

- HYDROpren, changeable dampening insert
- · long life, high abrasion stability for extreme loads

Locking

- innovative 2 point spring locking system
- hinders unauthorised opening = anti-theft
- through the positioning of the locking points the cover is centred in the frame and is frictionally locked

Options

- Frame SN H=275mm
- Frame flange H = 100 / 160mm
- Frame square SN H=170mm
- Cover with PUR-insert D400
- Cover C250



ISO 9001-2015